


Specification

Nominal Voltage		6V
Rated Capacity (20 hour rate)		7AH
Dimension	Total Height (with terminals)	101mm (3.98in)
	Height	95mm (3.74in)
	Length	151mm (5.94in)
	Width	34mm (1.34in)
Weight		Approx 1.30kg (2.86lbs)


Characteristic

Capacity 77°F (25°C)	20 hour rate (350mA)	7.00AH
	10 hour rate (630mA)	6.30AH
	5 hour rate (1.12A)	5.60AH
	1 hour rate (4.2A)	4.20AH
	15 min rate (11.9A)	2.98AH
Internal Resistance	Full charged Battery 77 °F (25 °C)	16mΩ
Capacity affected by Temperature (20 hour rate)	104 °F (40 °C)	102%
	77 °F (25 °C)	100%
	32 °F (0 °C)	85%
	5 °F (-15 °C)	65%
Self-Discharge 77 °F (25 °C)	Capacity after 3 month storage	90%
	Capacity after 6 month storage	80%
	Capacity after 12 month storage	60%
Max. Discharge Current 77 °F (25 °C)	70A ° 5S °	
Terminal	Standard	F2
	Optional	F3
Charging (Constant Voltage)	Cycle	Initial Charging Current 2.1A or small 7.2V~7.5V/77 °F (25 °C)
	Float	6.7~6.9V/77 °F (25 °C)

Duration of discharge vs. Discharge current

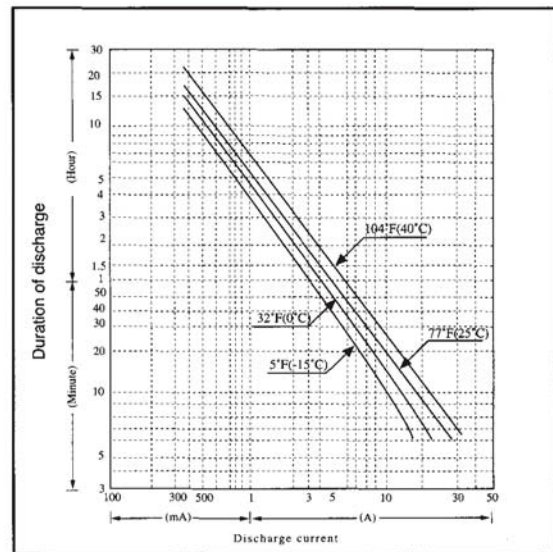

Discharge characteristics 77 °F (25 °C)

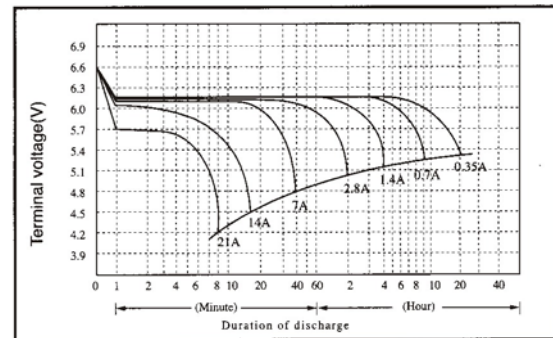

Constant wattage discharge (Watts per cell @ 25 °C)

Cut off voltage V/cell	5M	10M	15M	30M	40M	60M
1.75V	50.5	34.0	26.0	15.8	12.7	9.2
1.70V	51.5	34.7	26.3	16.2	13.0	9.4
1.67V	52.1	35.1	26.8	16.4	13.1	9.5
1.60V	53.3	35.9	27.4	16.7	13.4	9.7
1.50V	54.6	36.4	28.0	16.8	14.0	9.8

NOTE: The above data are average values and can be obtained within 3 charge/discharge cycles.

These are not minimum values.